

Ultra V Pro SHDXXXS - H48-Nth+ 430-450W


B
 96 (6 × 16)
 21.5
 -40 °C to +85 °C
 STP-XC4 /MC4-EVO2
 35 A
 (80 ± 5)%

SHD() \$G < (, ! B Ĥ Ž
 SHD() \$G < (, ! B Ĥ Ž
 SHD() \$G < (, ! B Ĥ Ž
 SHD(') \$G < (, ! B Ĥ Ž
 SHD(') \$G < (, ! B Ĥ Ž

	SHD() \$G < (, ! B Ĥ Ž		SHD() \$G < (, ! B Ĥ Ž		SHD() \$G < (, ! B Ĥ Ž		SHD(') \$G < (, ! B Ĥ Ž		SHD(') \$G < (, ! B Ĥ Ž	
	SHC	NMOH	SHC	NMOH	SHC	NMOH	SHC	NMOH	SHC	NMOH
fDa UI #K Ł	450	344.1	445	340.2	440	336.4	435	332.6	430	328.8
fJ a d #J Ł	29.32	28	29.14	27.8	28.97	27.7	28.79	27.5	28.61	27.3
fĤ a d #5 Ł	15.35	12.29	15.27	12.23	15.19	12.16	15.11	12.1	15.03	12.04
fJ c V Ĥ J	35.71	33.9	35.5	33.8	35.29	33.6	35.08	33.4	34.87	33.4
fĤ g V #5 Ł	16.01	12.91	15.93	12.84	15.85	12.78	15.77	12.72	15.69	12.65
(%)	22.5		22.3		22.0		21.8		21.5	

SHD() \$G < (, ! B Ĥ Ž ; \$K #a 2 Ž ; &S 25A 11) Ž ; %a #g Da UI Ž # ' i /

	5%	15%	25%
	472.5	517.5	562.5
	29.3	29.3	29.4
	16.12	17.65	19.19
	35.7	35.7	35.8
	16.81	18.41	20.01
	23.7	25.9	28.2

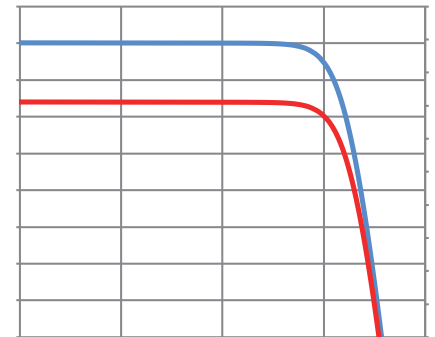

fBA CHŁ 42 ± 2 °C
 fDa UI Ł ! \$" & - i # . 7
 fJ c V Ĥ ! \$" &) i # . 7
 fĤ g V Ĥ Ž \$" & (* i # . 7