



STPXXXS - B72/Vnh

440-460W      21.1%

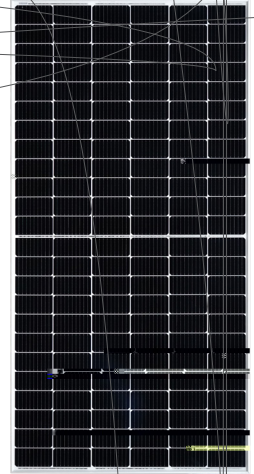

\*\*

CE  
IEC 61730  
IEC 61215  
SA 8000  
IEC TS 62941  
ISO 9001  
ISO 14001  
ISO 45001

2%



31

2079 x 1039 x 35  
(207.5 x 103.9 x 3.5)

Drainage  
B

STP460S-B72/Vnh  
IP68  
-40 ° C  
1500 V DC  
20 A  
0/+5 W

|          | STP460S-B72/Vnh |       | STP455S-B72/Vnh |       |
|----------|-----------------|-------|-----------------|-------|
|          | STC             | NMOT  | STC             | NMOT  |
| (Pmax/W) | 460             | 346.9 | 455             | 345.5 |
| (Vmp/V)  | 41.8            | 38.5  | 41.6            | 38.4  |
| (Imp/A)  | 11.01           | 9.00  | 10.94           | 8.94  |
| (Voc/V)  | 49.6            | 46.5  | 49.4            | 46.3  |
| (Isc/A)  | 11.74           | 9.47  | 11.67           | 9.42  |
| %        | 21.1            |       | 20.9            |       |

STC: 1000 W/m<sup>2</sup>, 25 ° C, AM1.5; NMOT: 800 W/m<sup>2</sup>, 20 ° C, AM1.5, 1 m/s Pmax +/- 3%

|        |             |
|--------|-------------|
| (NMOT) | 42 ± 2 ° C  |
| (Pmax) | -0.36%/° C  |
| (Voc)  | -0.304%/° C |
| (Isc)  | 0.050%/° C  |

|   |                    |      |
|---|--------------------|------|
|   | 13                 | 17.5 |
| / | 31                 | 31   |
| / | 24                 | 30   |
| / | 744                | 930  |
|   | 2125 x 1130 x 1205 |      |
|   | 814                |      |

